





Reliable
Ultra Portable
Easy to Operate



THE ONE & ONLY

The World's First ONE Inch Mobile Printer

1-inch



Solid 1-inch Cartridge




0 1 2 3 4 5 6 7 8 9

0.5-inch



Stitching Cartridges

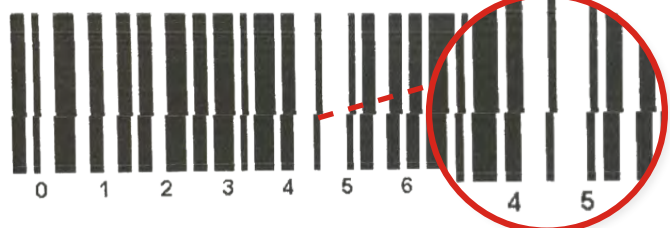

0 1 2 3 4 5 6 4 5





U2 MobileONE" Specifications

Display	3.5" Color LCD with LED backlight
User Interface	Simple and easy-to-use operating system
Input Device	Pocket-sized IR remote keypad
Available Languages	English, Japanese, French, German, Spanish, Portuguese, Russian, Korean, Italian, Turkish, Hungarian, Slovak, Czech, Swedish, Romanian, Polish, Serbian, Bulgarian, Chinese (Traditional & Simplified)
LED Indicators	Alarm, Ink low, Print, Run, Remote on/off
Print Engine	Thermal Ink Jet Technology
Print Resolution & Print Speed	600 x 300 dpi (60 m/min) Print quality is dependent on resolution and speed
Print Height	Up to 4 lines and 25.4mm (1") Selectable font size from 2mm, 2.8mm, 3.6mm, 5.4mm, 7.2mm, 9mm, 10mm, 12.8mm, 16mm, 20mm, 22mm, 25.4mm
Print Capability	Alphanumeric, logos, date/time, shift code, counter, lot box code, 1D & 2D barcode
Barcodes	Code-128, ITF-14(SCC-14), NVE(SSCC-18), EAN-128, PDF417, DUN-14, Data Matrix, QR Code, DUN-14, GS1 Datamatrix, GS1 DataBar, UPCA, UPCE, EAN-13, EAN-8, Code 25 Interleaved, Codabar, Code-39
Weight	1.13kg (2.5 lbs) Cartridge and battery not included
Dimensions	143.5 (L) x 219 (W) x 143 (H) mm
Message Storage Capacity	Store up to 999 messages
Operating Temperature	5°C - 40°C (41°F - 104°F)
Data Interface	RS-485 & USB

Long Lasting Battery

Rated Capacity	1,840 mAh
Standard Voltage	11.1V
Charging Voltage (Max)	12.6V
Charging Hours (Max)	2 hours
Charging Temperature Range	0°C - 45°C (32°F - 113°F)
Discharging Temperature Range	-20°C - 60°C (-4°F- 140°F)
Dimensions	100.3 (L) x 56.3 (W) x 21 (H) mm
Weight	150g (0.33 lbs)
Cycle Life	More than 300 cycles
Continuous Printing Hours	4 hours
Stand-by Time	4.6 hours



WWW.ANSER-U2.COM